



MCM-T5

T-Bar & Gypsum Square
Fitting with Aluminium Reflector

โคมตะแคงที่อลูมิเนียมสะท้อนแสง
ฝังฝ้าทีบาร์และฝ้าฉาบเรียบ (Two in one)



TIS.903-2532




TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
Diffuser :	99.90% anodized aluminium reflector to provide total reflectance of upto TR 95% Christmas tree profile crossbars reduce glare significantly.
Lamp holder :	Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

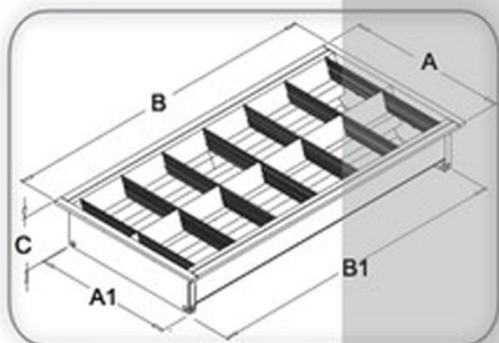

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	B1 (mm.)	C (mm.)	Ceiling cutout (mm.)
MCM1T5/1/14	1 x 14w T5	150	130	600	575	90	135 x 585
MCM1T5/1/28,54	1 x 28w,54w T5	150	130	1200	1175	90	135 x 1185
MCM1T5/3/14	1 x 14w T5	300	280	600	575	90	285 x 585
MCM2T5/3/14	2 x 14w T5	300	280	600	575	90	285 x 585
MCM1T5/3/28,54	1 x 28w,54w T5	300	280	1200	1175	90	285 x 1185
MCM2T5/3/28,54	2 x 28w,54w T5	300	280	1200	1175	90	285 x 1185

Note: subject to +/- 2 mm in tolerance

MCM-T5

T-Bar & Gypsum
Square Fitting
with Aluminium Reflector

โคมตะแกรงที่อลูมิเนียมสะท้อนแสง
ฝังฝ้าทีบาร์และฝ้าฉาบเรียบ (Two in one)



TIS.903-2532




TIS.1955-2542

SPECIFICATION

Housing :	Steel sheet thickness of 0.6-0.8 mm. And all metal parts are rust-proofed after fabrication to prevent any corrosion (zinc phosphate) and finished with high-grade epoxy polyester power coating.
Reflector :	99.90% purity anodized aluminium reflector to provide total reflectance of TR 87-95% mirror-finish, parabolic reflectors machined to provide optimum optical performance for maximum high-output-ratio.
Louver :	99.90% anodized aluminium reflector to provide total reflectance of upto TR 95% Christmas tree profile cosbars reduce glare significantly.
Lamp holder :	Rotary lock (G5) lamp holder certified by TIS NO.344-2549.
Wire :	Thw size 0.5-1.0 sqmm. 70 °c-105 °c certified by TIS NO.11-2531.

DRAWING

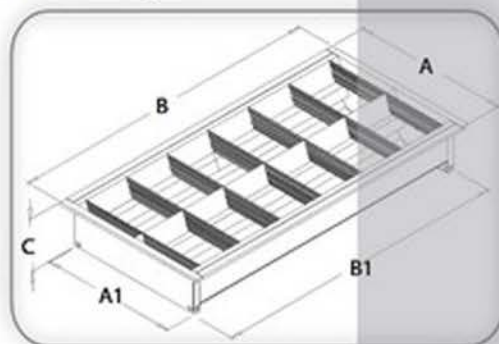

DIMENSION

Model No.	No. of Lamps	A (mm.)	A1 (mm.)	B (mm.)	B1 (mm.)	C (mm.)	Ceiling cutout (mm.)
MCM2T5/6/14	2 x 14w T5	600	580	600	575	120	585 x 585
MCM3T5/6/14	3 x 14w T5	600	580	600	575	105	585 x 585
MCM4T5/6/14	4 x 14w T5	600	580	600	575	105	585 x 585
MCM2T5/6/28,54	2 x 28w ,54w T5	600	580	1200	1175	120	585 x 1185
MCM3T5/6/28,54	3 x 28w ,54w T5	600	580	1200	1175	105	585 x 1185
MCM4T5/6/28,54	4 x 28w ,54w T5	600	580	1200	1175	105	585 x 1185

Note: subject to +/- 2 mm in tolerance